

Towbar Fitting Instructions
TO SUIT NISSAN NAVARA D40 DUALL CAB WITH REAR BUMPER STEP10-05-on
Part Number QTDS840
Rating 3000 kg

WARNING:

1. Do not, drill, cut, weld or otherwise modify the tow bar.
2. If you are using electric welding on a motor vehicle, **always** check that the vehicle is not equipped with electronic engine or instrument management equipment. Failure to do so could **destroy** any onboard computers. If in doubt, check with the vehicle's manufacturer.

- 1 Ensure all hardware items have been included.
- 2 Offer tow bar to rear of vehicle so to align slots in side plates with captive nuts on the underside of the chassis rails see fig 1.
- 3 Then fasten with M12 x 1.25 pitch bolts, flat & spring washers supplied as per diagram on the next page.
- 4 Align the chassis plates as per the diagram on the next page with the holes in the side arms of the tow bar being sure to add the loose plates between the vertical face of chassis rails & chassis plates.
- 5 Fit all hardware as per diagram on the next page.
- 6 Tighten all nuts & bolts to torque listing below.

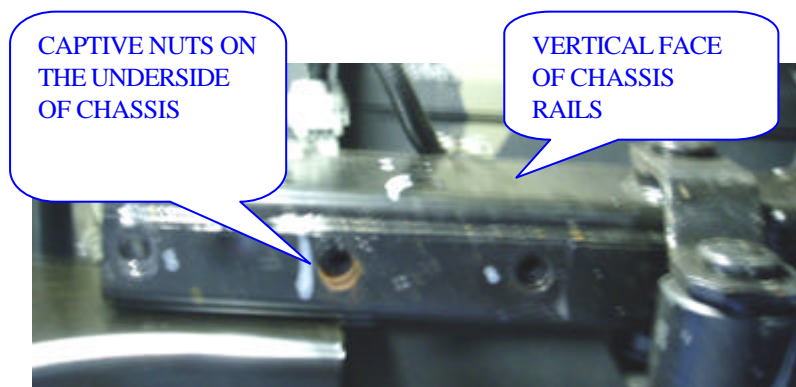


FIG 1

NOTE: TRAILBOSS recommends that you check your towball to ensure it complies with the Australian standard AS 4177.2

RECOMMENDED ASSEMBLY TORQUE LISTING

Diameter **Grade 8.8 Bolt**

Nm;


M6	9.5
M8	21.7
M10	43.4
M12	77.3
M16	189.8

FOR TOWING PURPOSES ONLY
For towing capacity details please refer to vehicle owner's manual or to the manufacturer. Overloading can void your warranties.

PLEASE NOTE: It is advised to remove lug from receiver box when not actually towing so as to produce a clear view of the vehicles registration plate if obscured, and to also provide increased departure angle



Towbar Fitting Instructions
TO SUIT NISSAN NAVARA D40 DUALL CAB WITH REAR BUMPER STEP10-05-on
Part Number QTDS840
Rating 3000 kg

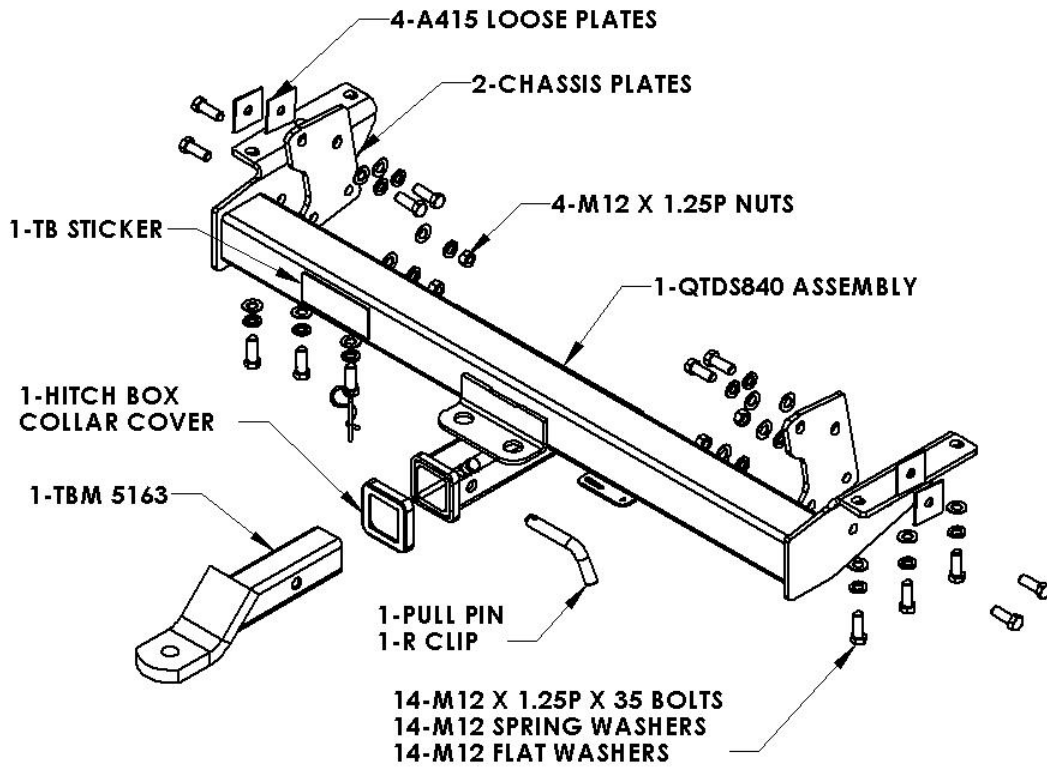

TOWBALL WEIGHT NOTES:

As per motor vehicle manufactures specification the towing capacity is subject to tow bar/towball capacity. The permitted download is directly related to the laden mass of vehicle. The maximum towball download is 300kg.

2WD Model

Towball download	Vehicle mass
70kg	GVM (all variants)
100kg	Reduced loaded vehicle mass below GVM by 40kg
150kg	Reduced loaded vehicle mass below GVM by 110kg
200kg	Reduced loaded vehicle mass below GVM by 180kg

4WD Model

Towball download	Vehicle mass
150kg	GVM (All variants)
200kg	Reduced loaded vehicle mass below GVM by 60kg
250kg	Reduced loaded vehicle mass below GVM by 130kg
300kg	Reduced loaded vehicle mass below GVM by 200kg

If the loaded vehicle mass is reduced as shown in the table, the towball download can be increased correspondingly. Accordingly, if the laden mass is 180kg less than the GVM, a towball download of 200kg is approved (2WD).

Different trailer types and different trailer manufacturers have varying towball downloads. The customer will need to contact the trailer manufacturer for information as to the download.

GVM includes the driver, 4 passengers, full fuel tank and luggage.

CAPACITY	4x2 ST-X Petrol	4x4 RX Petrol	4x4 RX Diesel	4x4 ST-X Petrol	4x4 ST-X Diesel
-----------------	------------------------	----------------------	----------------------	------------------------	------------------------



Towbar Fitting Instructions
TO SUIT NISSAN NAVARA D40 DUALL CAB WITH REAR BUMPER STEP10-05-on
Part Number QTDS840
Rating 3000 kg

2000/200

3000/300

3000/300

3000/300

3000/300